

## Stereo A/V Switch

Model 627A

### SPECIFICATIONS

**Frequency Response:**

± 1 dB 0 to 950 MHz

**Audio**

Balanced Stereo; Screw Terminals

**Video/RF**

75 $\Omega$ ; 'F' Connectors

**Video/RF Isolation @ 950 MHz**

> 52 dB

**Video IF/RF Return Loss**

> 22 dB

**Control Input**

< 2 mA maximum to GND

**Power Requirement for  
External Power Supply:**

100-240 VAC ± 2%, 50/60 Hz.  
(Supplied)


**Physical:**

1.5" H x 2.75" W x 5.25" D

Weight: 1 lb.

### FEATURES

- Video Switch works from 0 to 950 MHz
- Small size
- 'F' connectors
- Unused signals terminated in 75  $\Omega$
- Includes 12 VDC power pack
- Flanged enclosure for easy mounting

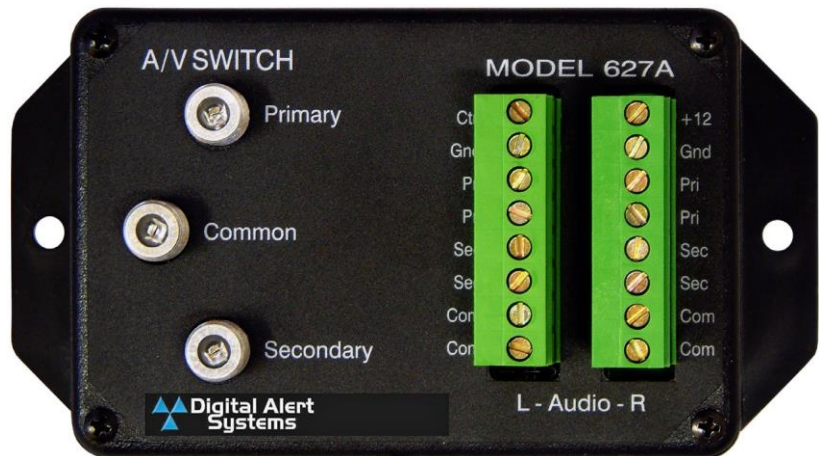

### DESCRIPTION

Digital Alert Systems Model 627A Stereo Audio/Video Switch module provides 2 x 1 (AB) balanced stereo audio follow video switching.

The 2 x 1 switch will respond to a contact closure or a transistor switch to ground. The control input is buffered to eliminate high output current drive requirements of the controlling device.

The 627A can be controlled by Digital Alert Systems program timers, remoted controls or CATV Cue Tone receivers.

### Emergency Messaging Platforms CATV switching and Control

100 HouseI Ave., P.O. Box 535  
Lyndonville, NY 14098  
(585)765-2254 (585)765-1155  
fax (585)765-9330

[www.digitalalertsystems.com](http://www.digitalalertsystems.com)

Copyright © 2010-2024 Digital Alert Systems Inc.  
Information herein is considered accurate at the time of  
publication. We constantly strive to improve our products  
and services therefore some specifications are subject to  
change without notice. One-Net<sup>SM</sup>, DASDEC-II, MultiStation,  
Multiplayer, EAS-Net, EAS-CAP, CMPro and CMPlus are  
trademarks of Digital Alert Systems Inc. Other logos and  
trademarks are property of their respective owners.  
All rights reserved